

ambition

Bulk Apple Handling System


Project Tech

Project Overview:

- Handling & conveying lorry loads of apples into the production plant and processing equipment.
- Handling product from up to 6 lorries outside the production plant.
- Apples are transported into the plant and up to a product pumping system, or holding tank.

Product: Apples


Line Capacity: 40 ton/hour

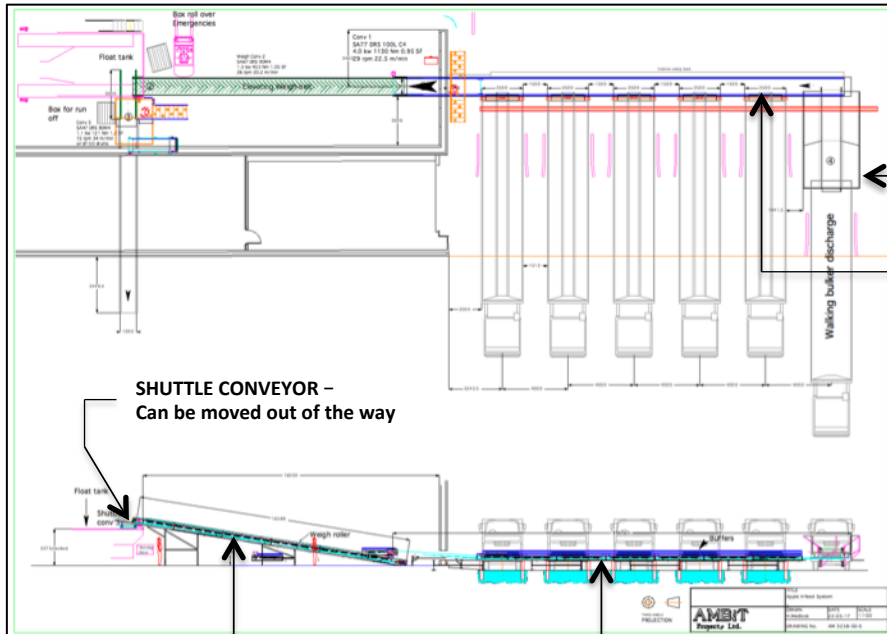

Bulk Hopper – Handles 4000kg, mobile unit can be used in multiple locations



All equipment was manufactured in stainless steel

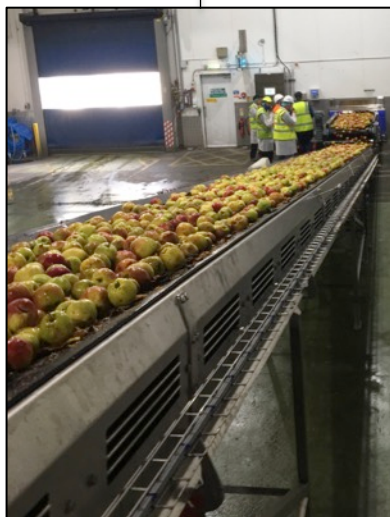

Trough Elevator – From infeed conveyor up to shuttle conveyor



Infeed conveyor transfers lorry discharge to trough elevator



Discharge from lorries onto infeed conveyor, lorry buffer stops lorry ready for discharge